

Mini connectors 5P - M25 Polyester
Mini connectors 5P - M25 Polyester

Technische informatie:

Ex markering: Ⓜ II 2G Ex eb IIC T6 Gb
Ⓜ II 2D Ex tb IIIC T72°C Db IP67
Geschikt voor zone 1, 2, 21 en zone 22
Omgevingstemperatuur: $-20^{\circ}\text{C} \leq T_a \leq 70^{\circ}\text{C}$
Beschermingsgraad: IP67
Materiaal: Glasvezel versterkt polyester
Spanning: maximaal 250V AC/DC - 50/60 Hz.
Stroom: 5A
Aantal polen: 5
Draaddoorsnede 0,75 to 2,5 mm²



Conform de standaards: EN60079

Technical data:

Ex mark: Ⓜ II 2G Ex e IIC T6 Gb
Ⓜ II 2D Ex tb IIIC T85°C Db IP67
Can be used in zone 1, 2, 21 and zone 22
Ambient temperature: $-25^{\circ}\text{C} \leq T_a \leq 85^{\circ}\text{C}$
Degree of protection: IP67
Material: Glass fibre reinforced polyester
Voltage: max. 250 V AC/DC - 50/60 Hz.
Current: max. 5A
Poles : 5
Wiring size 0.75 to 2.5 mm²

Meets the standards: EN60079

Afbeelding	Illustration	Omschrijving Description	Artikel Item	Type
		Contrastekker Coupler	PNCX socket	Z0262 - M - 06E3007
		Paneelinbouw contactdoos Flange socket	PNCX Socket	Z0262 - M - 06E4007
		Montage beugel tbv inbouw in Z0265 Bracket for mounting in Z0265	DXN1 - Bracket	Z0262 - M - 251A457-E

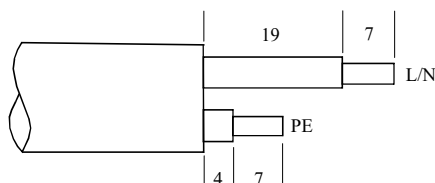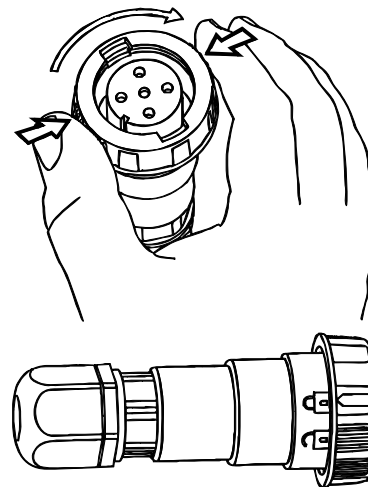

Mini connectors - M12 Messing
Mini connectors - M12 Brass

Technische informatie:

Ex markering: Ⓜ II 2G Ex eb IIC T6 Gb
Ⓜ II 2D Ex tb IIIC T85°C Db
Geschikt voor zone 1, 2, 21 en zone 22
Omgevingstemperatuur: $-25^{\circ}\text{C} \leq T_a \leq 85^{\circ}\text{C}$
Beschermingsgraad: IP67
Materiaal: Messing vernikkeld
Spanning: maximaal 250V AC/DC - 50/60 Hz.
Stroom: maximaal 4A
Draaddoorsnede 0,34 tot 0,75 mm²



Conform de standaards: EN60079

Technical data:

Ex mark: Ⓜ II 2G Ex eb IIC T6 Gb
Ⓜ II 2D Ex tb IIIC T85°C Db
Can be used in zone 1, 2, 21 and zone 22
Ambient temperature: $-25^{\circ}\text{C} \leq T_a \leq 85^{\circ}\text{C}$
Degree of protection: IP67
Material: Brass nickel plated
Voltage: max. 250 V AC/DC - 50/60 Hz.
Current: max. 4A
Wiring size 0.34 to 0.75 mm²

Meets the standards: EN60079

Afbeelding Illustration	Omschrijving Description	Aantal poles Number of Poles	Spanning / stroom Voltage / current	Type
	Connector M12 - Male	4 - polig / 4 - pole	230 V AC/DC - 4A	Z0260 - HP 04MB
	Connector M12 - Female	4 - polig / 4 - pole	230 V AC/DC - 4A	Z0260 - HP 04FB
	Connector M12 - Male	5 - polig / 5 - pole	60 V AC/DC - 4A	Z0260 - HP 05MB
	Connector M12 - Female	5 - polig / 5 - pole	60 V AC/DC - 4A	Z0260 - HP 05FB
	Connector M12 - Male	8 - polig / 8 - pole	30 V AC/DC - 2A	Z0260 - HP 08MB
	Connector M12 - Female	8 - polig / 8 - pole	30 V AC/DC - 2A	Z0260 - HP 08FB
	Connector M12 - Male	12 - polig / 12 - pole	30 V AC/DC - 1.5A	Z0260 - HP 12MB
	Connector M12 - Female	12 - polig / 12 - pole	30 V AC/DC - 1.5A	Z0260 - HP 12FB

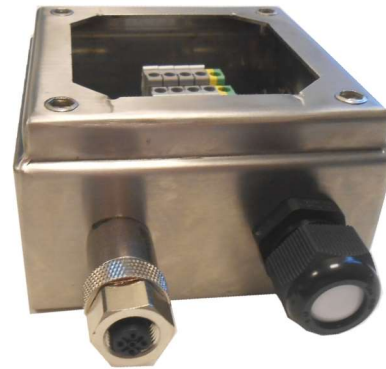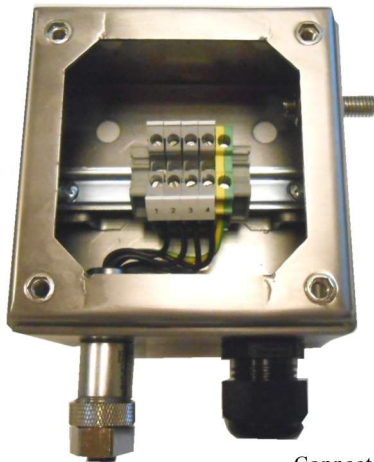

Connector gemonteerd op Ex e klemmenkast
Connector mounted on Ex e junctionbox

**Afmetingen
Dimensions**

